MDF-40V528 -40°C Medical Deep Freezer





FEATURERS



Imported brand compressors

Double cooling system, double chamber



Fast pull down

150 minutes from +25°C to -40°C



Coil evaporator

Better performance, easy maintenance



Thick PURF insolation

Better insulation performance



Lockable doors

Standard locks & padlocks



Large LED displays

refrigeration system. Both chambers can be independently

Easy to observe and operate, built-in USB



Precise temp. control

Temp. control accurate to 0.1°C



6 types of alarm

Audible and visual alarms




Variable space

Adjustable shelves and drawers




Eco-friendly

CFC-free refrigerant and energy-saving




MDF-40V528 Pull down at ambient temp. 32°C





STRUCTURE

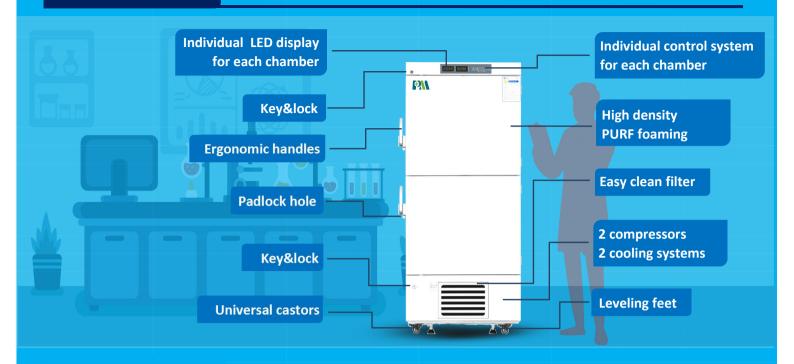



PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct cooling	Compressor brand/QTY	CUBIGEL/2	High/low temperature	
Defrost	Manual	Condenser	Copper tube	Power failure	
Refrigerant	R290	Temp. controller	Microprocessor	Sensor error	
Temperature range	-20°C~-40°C	Sensor	NTC	Controller failure	
Ambient temperature	10~32℃	Display	Digital display	Door ajar	Υ

Electrical Data		Dimensions		Other	
Voltage frequency(220/50Hz	Capacity (L/cu.ft)	528/18.64	Remote alarm port	
Power (W)	340W	Exterior	910*845*1875	Remote alarm port	
Current (A)	3.4 A	Interior	(651*631.5*635)*2	Access port QTY/Dia.	2/25MM