

FEATURERS



Fast pull down

Better cooling performance



Coil evaporator

Better temperature uniformity



Inner-door design

4 individual inner door




Universal castor wheels

Proven heavy-duty lockable castors



Lockable doors

Standard locks with keys

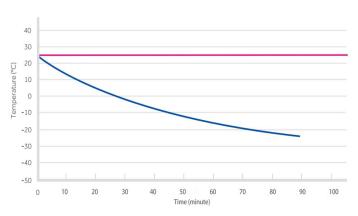

MDF-25V268E Pull Down Test at Ambient



biological and chemical reagents.

High-quality steel materials

Antibacterial and corrosion resistant



Precise temp. control

Temp. control accurate to 0.1°C



5 types of alarm

Audible and visual alarms



Variable space


Height adjustable shelves




Eco-friendly

CFC-free refrigerant and energy-saving





STRUCTURE

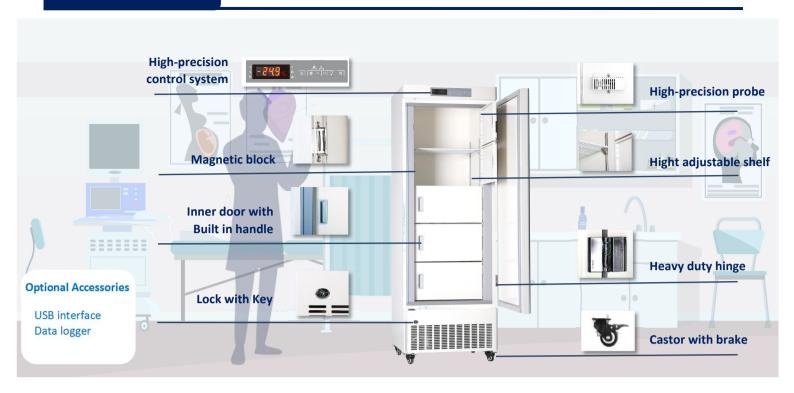



Sensor erro alarm

High/low temp. alarm

Power failure alarm

Door ajar alarm

Thermostat failure alarm



Coil evaporator cooling system makes the chamber temperature more uniform.
The 4 independent inner doors give the cabinet better insulation performance and are more convenient to use.

PARAMETER

Performance		Refrig	Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R600a	High/low temperature	Υ	
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Υ	
Shelf/drawer	Shelves and draws	Sensor	NTC	Sensor error	Υ	
Temperature range	-10~-25	Display	Digital display	Controller failure	Υ	
Ambient temperature	10~32°C	External material	SPCC sprayed steel	Door ajar	Υ	
Noise (db)	/	Compressor QTY	1	Power failure backup	8 hours	

Electrical Data		Dimensions		Other	
Voltage frequency(V/Hz)	220V 50Hz	Package size(W*D*H)(mm)	590*590*900	Inner door Qty	5
Power (W)	48W	Capacity (L/cu.ft)	100/3.53	Remote alarm port	Optional
Current (A)	0.9A	Exterior size(W*D*H)(mm)	540*540*880	Access port QTY/Dia.	1/25mm
Power consumption	2.2kWh/24h	Interior size(W*D*H)(mm)	410*410*670	Internal material	SPCC sprayed steel