
40 ℃ MEDICAL DEEP FREEZER





FEATURERS

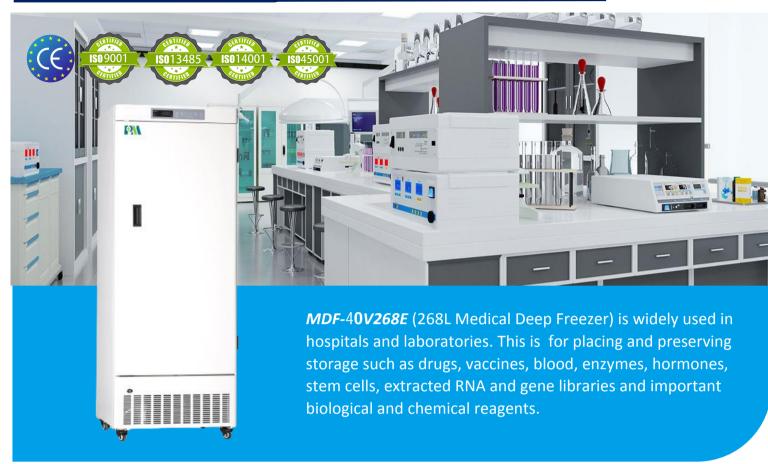

Fast pull down

Better cooling performance



Coil evaporator

Better temperature uniformity



Inner-door design

4 individual inner door




Universal castor wheels

Proven heavy-duty lockable castors



Lockable doors

Standard locks with keys

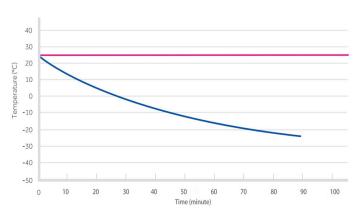

MDF-25V268E Pull Down Test at Ambient



High-quality steel materials

Antibacterial and corrosion resistant



Precise temp. control

Temp. control accurate to 0.1°C



5 types of alarm

Audible and visual alarms



Variable space


Height adjustable shelves



Eco-friendly

CFC-free refrigerant and energy-saving





STRUCTURE



PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R290	High/low temperature	Υ
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Υ
Shelf/drawer	Shelves/5	Sensor	NTC	Sensor error	Υ
Temperature range	-20℃~-40℃	Display	Digital display	Controller failure	Υ
Ambient temperature	10~32°C	External material	SPCC sprayed steel	Door ajar	Υ
Noise (db)	48	Compressor QTY	CUBIGEL/1	Power failure backup	8 hours
Electrical Data		Dimensions		Other	
Voltage frequency(V/Hz)	220V 50Hz/60Hz	Package size(W*D*H)(mm)	760*760*1750	Inner door	4
Power (W)	300W	Capacity (L/cu.ft)	268/9.46	Remote alarm port	Optional
Current (A)	1.6A	Exterior size(W*D*H)(mm)	690*680*1635	Access port QTY/Dia.	1/25mm
Power consumption	4kWh/24h	Interior size(W*D*H)(mm)	508*455*1137	Internal material	SPCC sprayed steel