
MDF-40v278W

-40 ℃ MEDICAL DEEP FREEZER






FEATURERS

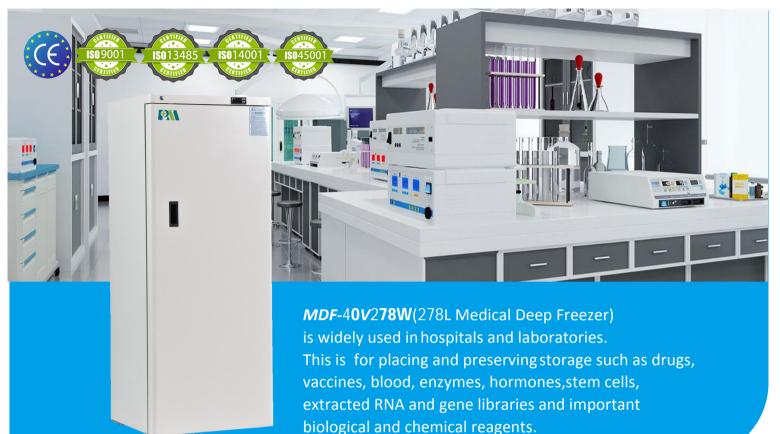

Universal castor wheels Proven heavy-duty lockable castors

Lockable doors Standard locks with keys



MDF-25V268E Pull Down Test at Ambient



High-quality steel materials Antibacterial and corrosion resistant



Precise temp. control Temp. control accurate to 0.1°C




5 types of alarm Audible and visual alarms




Ŷ

Variable space Height adjustable shelves

Eco-friendly CFC-free refrigerant and energy-saving





STRUCTURE





PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	R290	High/low temperature	Y
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Y
Shelf/drawer	Drawer/7	Sensor	NTC	Sensor error	Y
Temperature range	-30°C∼-40°C	Display	Digital display	Controller failure	Y
Ambient temperature	10~32°C	External material	SPCC sprayed steel	Door ajar	Y
Noise (db)	50	Compressor QTY	1	Power failure backup	8 hours
Electrical Data		Dimensions		Other	
Voltage frequency(V/Hz)	220V 50Hz	Package size(W*D*H)(mm)	725*665*1850	Inner door Qty	7 Drawer
Power (W)	110W	Capacity (L/cu.ft)	278/9.81	Remote alarm port	Optional
Current (A)	1.6A	Exterior size(W*D*H)(mm)	659*600*1694	Access port QTY/Dia.	1/25mm
Power consumption	3kWh/24h	Interior size(W*D*H)(mm)	480*415*1460	Internal material	SPCC sprayed steel

